
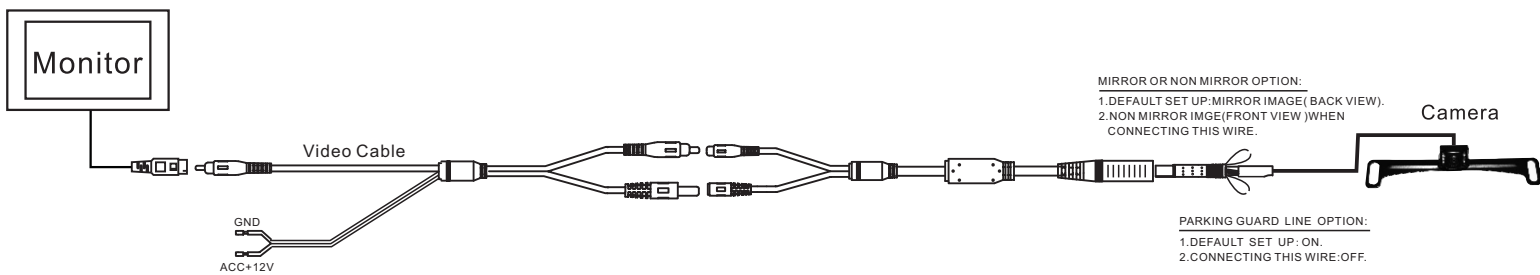


 <p>Option(1)</p>  <p>Option(2)</p> <p>LB1001N</p>	Current Consumption	MAX:150mA
	Sensor	CMD-III, 1 / 4 "
	Resolution (TV LINES)	420
	Minimum illumination	0Lux
	Angle	150°
	Effective Pixels	648*488
	TV System	NTSC
	Video output	Full color video out: 1.0Vp-p 75 (ohm) load
	Working Voltage	DC9-16V
	Video Color	Full color
	Water Proof	IP67-IP68
	Operating Temperature	-30℃ to +70℃
	Parking guard line	On or Off Switchable
	Image	Mirror, Non mirror Switchable

Installation Instruction



 <p>Option(1)</p>  <p>Option(2)</p> <p>LB1001N</p>	Current Consumption	MAX:150mA
	Sensor	CMD-III, 1 / 4 "
	Resolution (TV LINES)	420
	Minimum illumination	0Lux
	Angle	150°
	Effective Pixels	648*488
	TV System	NTSC
	Video output	Full color video out: 1.0Vp-p 75 (ohm) load
	Working Voltage	DC9-16V
	Video Color	Full color
	Water Proof	IP67-IP68
	Operating Temperature	-30℃ to +70℃
	Parking guard line	On or Off Switchable
	Image	Mirror, Non mirror Switchable

Installation Instruction

